



INDUSTRY 4.0



FP145

Big brother of the famous FP120 with more force, bigger opening and larger dies.

The 140-series die system with adaptor dies makes an excellent choice for large, medium and even small size fittings.

FP145 is an ideal machine for 2" 6-wire hoses and also for medium range industrial hoses.

TECHNICAL DATA

Max crimping dia (mm/inch) ¹⁾	124/4.88
Max crimping dia with master dies (mm/inch)	150/5.9
Max. crimping force (kN)	3500
Max. crimping force (tonnage)	350
Cycle time 10 mm (s) ²⁾	2.5
Hydraulic hose size (inch)	2 ½ *
Industrial hose size (inch)	4.88 *
Die set series	32/140/145
Max. opening (mm) ³⁾	+82
Max. opening without dies (mm)	222
Master die D/L (mm)	140/116
Master die D/L (inch)	5.52/4.57
Motor Power (kW/HP)	6.5/8.8
Oil tank volume	135 l

DIMENSIONS (LxWxH)

Machine (mm)	881x683x1561
Hydraulic Unit (mm)	782x753x1043
Machine (inch)	34.7x26.9x61.5
Hydraulic Unit (inch)	30.8x29.6x41.0


WEIGHT (KG/LBS)

Machine	1053/2317
Hydraulic Unit	220/484

* ACCORDING TO THE FITTING.



Side die rack as an option, 5 slots (Compact only)

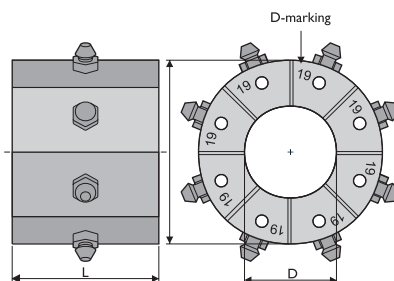

- 1) With standard dies. Crimping range can be increased with special dies.
- 2) Theoretical with 10 mm cycle.
- 3) Maximum opening is the total die travel. Add this value to the minimum crimping diameter of the die set used. The result is the maximum opening of the machine with die set in place.

ABSOLUTE
QUALITY
MADE IN
FINLAND

CONTROL

ICC (7" touchscreen) or
SCC (5" touchscreen)

STANDARD FEATURES

QuickChange-tool (part no 701049)
Electric backstop device (part no 705183)
Mirror (part no 054010)
Adapter dies for 32-series dies (part no 704631)
Die racks (part no: 721486)
The same part goes for right and left.
Pressure crimping (ICC only)
Step crimping

OPTIONS (SCC & ICC)

Foot pedal (part no 691563)
Side table (part no: 719216 (right), 719152 (left))
Side die rack, 5 slots (Compact only) (part no 717685)
Die rack, 9 slots (part no: 721486)
The same part goes for right and left.
Mechanical back stop device (part no 704920)
Interface pack ETH (Communication TCP/IP & UDP)
Oil cooler J3 **
Combi unit (crimping and hydraulic unit combined)
Pinning support mandrel
Horizontal Back layout HB
Horizontal Side layout HS
** Will have impact on motor size,
hydraulic unit dimensions and weight

OPTIONS (ICC ONLY)

Smart die rack SDR (8 or 16 slot model available)
Quality control ICC3
Graphical quality control ICC4
Auto greasing G3
Bar Code Reader BCR
Speed adjustment **
Oil Condition Monitoring OCM
Industry 4.0
A3 signal
Camera with 7" display
** Will have impact on motor size,
hydraulic unit dimensions and weight.

DIE SET 145-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
18860/84/120	84	120	84.0-92.0
18860/92/120	92	120	92.0-100.0
18860/100/120	100	120	100.0-108.0
18860/108/120	108	120	108.0-116.0
18860/116/120	116	120	116.0-124.0

DIE SET 32-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
18506/10	10	55	10.0-12.0
18506/12	12	55	12.0-14.0
18506/14	14	55	14.0-16.0
18506/16	16	55	16.0-19.0
18506/19	19	55	19.0-22.0
18506/22	22	70	22.0-26.0
18506/26	26	70	26.0-30.0
18506/30	30	70	30.0-34.0
18506/34	34	75	34.0-39.0
18506/39	39	75	39.0-45.0
18506/45	45	90	45.0-51.0
18506/51	51	90	51.0-57.0
18506/57	57	100	57.0-63.0
18506/63/120	63	120	63.0-69.0
18506/69/120	69	120	69.0-75.0
18506/74/120	74	120	74.0-80.0
18506/78/120	78	120	78.0-87.0

In addition to the standard die sets, a wide range of special die sets is available on request.