

# SP350

Finn-Power SP-series crimping machines with open C-frame structure are optimal for crimping any odd shape, bent or otherwise complex hose assemblies.

SP350 with 35 ton force is designed for demanding automotive hoses and other bent components requiring side feeding. SP350 has adjustable crimp head angle for easier part orientation and visibility. SP350 comes with moveable swing arm for ICC control.

SP350 also available in following configurations:

- Z-model with separate crimping head and hydraulic unit
- S-model with enhanced cycle time
- D-model with double head configuration

See details from specific product cards.



## TECHNICAL DATA



Crimping range (mm) <sup>1)</sup>	10-54
Crimping range (inch) <sup>1)</sup>	0.39-2.12
Max. crimping force (kN)	350
Max. crimping force (tonnage)	35
Cycle time 10 mm (s) <sup>2)</sup>	1.1 (S-model: 0.7)
Hose size ID (inch)	1 1/4
Die set series <sup>3)</sup>	CC22
Max. opening (mm) <sup>4)</sup>	+25/+48
Master die D/L (mm)	84/78
Master die D/L (inch)	3.31/3.07
Motor Power (kW/HP)	3.0/4.0
Oil tank volume	50 l

## DIMENSIONS (LxWxH)

Machine (mm)	970x1020x1871
Machine (inch)	38.2x40.2x73.7

## WEIGHT (KG/LBS)

710/2050

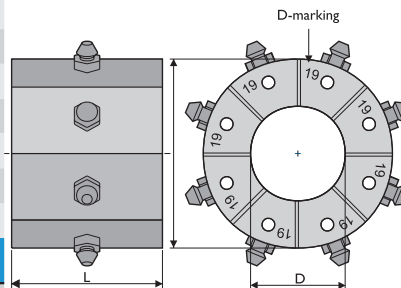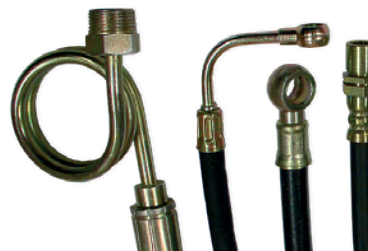

- 1) With standard dies. Crimping range can be increased with special dies.
- 2) Theoretical with 10mm cycle.
- 3) See table for die set data.
- 4) Maximum opening is the total die travel. Add this value to the minimum crimping diameter of the die set used. The result is the maximum opening of the machine with die set in place.

## CONTROL

ICC (7" touchscreen)

## STANDARD FEATURES

QuickChange-tool  
Foot pedal (Standard and S-model)

## OPTIONS

Foot pedal (Z-model)  
Auto greasing G3  
Remote control (R1, R2)  
Pressure crimping ICC1  
Step crimping ICC2  
Quality control ICC3  
Graphical quality control ICC4  
Interface pack ETH (Communication TCP/IP & UDP)  
A3 signal (cable not included)  
Bar Code Reader BCR  
Auto greasing G3  
ICC 12" display

## DIE SET CC22-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
18315/10	10	50	10.0-12.0
18315/12	12	50	12.0-14.0
18315/14	14	50	14.0-16.0
18315/16	16	50	16.0-19.0
18315/19	19	50	19.0-23.0
18315/23	23	50	23.0-27.0
18315/27	27	50	27.0-31.0
18315/31	31	50	31.0-36.0
18315/36	36	50	36.0-41.0
18315/41	41	50	41.0-47.0
18315/47	47	50	47.0-54.0

In addition to the standard die sets, a wide range of special die sets is available on request.

**FURTHER INFO ON OPTIONS,  
PLEASE REVERT TO SPECIFIC PRODUCT CARD**

**POWERCO.LILLBACKA.COM LILLBACKAUSA.COM**

**J&E Machines B.V.** Jacobus Lipsweg 100  
3316 BP Dordrecht - The Netherlands  
T: +31 (0)78 - 61 79 839  
I: [www.jemachines.nl](http://www.jemachines.nl) - E: [info@jemachines.nl](mailto:info@jemachines.nl)