



CM30CS

Please note that the images are for illustrative purposes only. The final product may vary in design, features or specifications.

CM30CS is designed for service van use. CM30CS is manually operated and easy to use and it comes with a fume exhaust connection.

12 or 24V operated versions available.

Please also see product cards for other CM30/35 configurations.

ABSOLUTE
QUALITY
MADE IN
FINLAND

TECHNICAL DATA

Max. hose size (inch) ¹⁾	2 / 1 ¼
Diameter (blade) external (mm)	300x3
Diameter (blade) internal (mm)	30
Max. hose OD (mm)	70
Exhaust outlet OD (mm)	60
Motor Power (kW) ²⁾	2.2 / 1.5
Motor Power (HP) ²⁾	3.0 / 2.0
Velocity, 12VDC (rpm)	3000
Velocity, 24VDC (rpm)	2800

DIMENSIONS (LxWxH)

mm	600x503x739
inch	23.6x19.8x29.1

WEIGHT

kg/lbs	37/81,4
--------	---------

Power supply cable not included.


- 1) Hydraulic hose, 1-2 wire / 4 wire
- 2) 12V / 24V. Overload controlled.

STANDARD FEATURES

Toothed blade (part no 12297)

OPTIONS

Smooth blade (part no 12319)

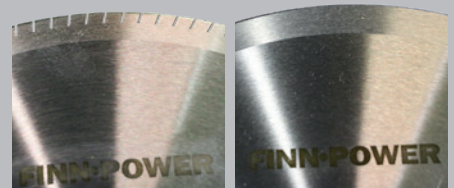

Toothed blade as a standard feature.

Smooth blade as an option.