

SP100

Finn-Power SP-series crimping machines with open C-frame structure are optimal for crimping any odd shape, bent or otherwise complex hose assemblies.

SP100 with 10 ton force is specially designed for small automotive hoses.

SP100 also available in following configurations:

- Z-model with separate crimping head and hydraulic unit
- S-model with enhanced cycle time
- D-model with double head configuration

See details from specific product cards.



CONTROL

ICC (7" touchscreen)

STANDARD FEATURES

QuickChange-tool
Foot pedal (Standard and S-model)

OPTIONS

Foot pedal (Z-model)
Auto greasing G3
Remote control (R1, R2)
Pressure crimping ICC1
Step crimping ICC2
Quality control ICC3
Graphical quality control ICC4
Interface pack ETH (Communication TCP/IP & UDP)
A3 signal (cable not included)
Bar Code Reader BCR
Auto greasing G3
ICC 12" display

TECHNICAL DATA



Crimping range (mm) ¹⁾	10-46
Crimping range (inch) ¹⁾	0.39-1.81
Max. crimping force (kN)	100
Max. crimping force (tonnage)	10
Cycle time 10 mm (s) ²⁾	1.9 (S-model: 0.9)
Hose size ID (inch)	1 1/4
Die set series ³⁾	SP100
Max. opening (mm) ⁴⁾	+11/+62
Master die D/L (mm)	70/40
Master die D/L (inch)	2.75/1.58
Motor Power (kW/HP)	3.0/4.0
Oil tank volume	50 l

DIMENSIONS (LxWxH)

Machine (mm)	814x782x1670
Machine (inch)	32.0x30.8x65.7

WEIGHT (KG/LBS)

383/844

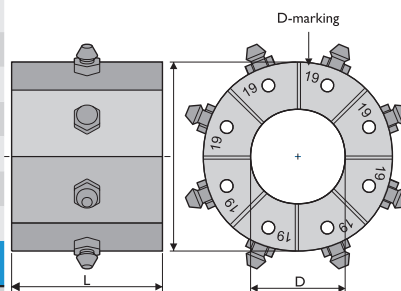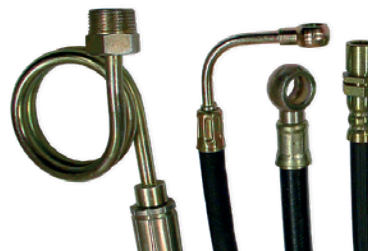

- 1) With standard dies. Crimping range can be increased with special dies.
- 2) Theoretical with 10mm cycle.
- 3) See table for die set data.
- 4) Maximum opening is the total die travel. Add this value to the minimum crimping diameter of the die set used. The result is the maximum opening of the machine with die set in place.

DIE SET SP100-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
701817/10	10	40	10.0-12.0
701817/12	12	40	12.0-14.0
701817/14	14	40	14.0-16.0
701817/16	16	40	16.0-19.0
701817/19	19	40	19.0-23.0
701817/23	23	40	23.0-27.0
701817/27	27	40	27.0-31.0
701817/31	31	40	31.0-36.0
701817/36	36	40	36.0-41.0
701817/41	41	40	41.0-47.0
701817/47	47	40	47.0-54.0

In addition to the standard die sets, a wide range of special die sets is available on request.

**FURTHER INFO ON OPTIONS,
PLEASE REVERT TO SPECIFIC PRODUCT CARD**

POWERCO.LILLBACKA.COM LILLBACKAUSA.COM

J&E Machines B.V. Jacobus Lipsweg 100

3316 BP Dordrecht - The Netherlands

T: +31 (0)78 - 61 79 839

I: www.jemachines.nl - E: info@jemachines.nl